

SPECIFIALLY ENGINEERED FOR PUMPING THERMOPLASTIC

REBUILD COST LESS THAN 1/2 OF A REPLACEMENT PUMP

REBUILDABLE IN PLACE; NO NEED TO REMOVE IT FROM PLUMBING





HOG PUMP

PAVEMENT MARKING EOUIPMENT

ADVANTAGES

- Rebuildable in place (no need to remove from plumbing)
- Easily adapts to any existing configuration
- Delivers even flow producing excellent starts and stops
- with straight even edges
- Weight: 200 lbs (90.71 kg) lighter than competitive pumps
- 33" (83.82 cm) shorter than competitive pumps
- Engineered cavity clearances to minimize wear from glass bead intermix of thermoplastic
- Hardened wear surfaces
- Rebuild cost is less than 1/2 the cost of a replacement pump
- Oil-jacketed thermo cavity
- Constant compression mechanical shaft seals
- Engineered to pump thermoplastic at higher pressures required by spray as well as lower demand pressures for ribbon and transfer

SPECIFICATIONS

PUMP

INLET/OUTLET PORT: 2" (5 cm) NPT

MAX RPM: 250

MAX OPERATING TEMPERATURE: 500°F (260°C) MAX INPUT TORQUE: 3,043 in/lbs (244 Nm)

MAX PSI: 100

HYDRAULICS

DISPLACEMENT: 140cc / rev OUTPUT: Shaft 1" (2.54 cm) spline

COUPLING: 1" (2.54 cm) Internal spline direct coupled

HYDRAULIC PRESSURE: 2,250 psi (155 bar) OIL-JACKETING PORT: 1/2" (1.27 cm) NPT


OVERALL DIMENSIONS: 25.5" H x 13" W x 9" D (25.5 cm H x 33

cm W x 22.86 cm D)

FLOW RATE: 180 lbs (81.6 kg) /min @150 RPM

300 lbs (136 kg) /min @300 RPM

550 lbs (249.4 kg) /min @450 Max RPM

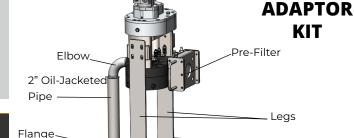

THE HOG DIFFERENCE

- 98% of spare parts orders are shipped on the same day they are received, resulting in minimal downtime.
- Hog Tech University Our New Learning Management System is the perfect place for your team members to receive certification and on-going training. Certified Operators maximize the productivity of your truck while maintaining the highest levels of safety at the lowest operating costs.
- Hog Technologies has a team of engineers and over 100 years of combined real-world experience to create the world's best solutions in every product we manufacture.
- 24/7/365 customer support is available with Certified Technicians within 10 minutes in multiple languages.





USA: 3920 SE Commerce ave., Stuart, FL 34997 • PHONE: 1-772-214-1714 **EUROPE:** Vavreckova 7074 | 760 01 Zlin, Czech Republic • **PHONE:** +420 573 903 031

EMAIL: sales@thehog.com • WEB: www.TheHog.com